



**READ THOROUGHLY BEFORE INSTALLING
SAVE THESE INSTRUCTIONS FOR FUTURE USE**

WARNING

Risk of electric shock

- Turn power off before servicing
- see instructions

WARNING

Decorative protrusions may cause injury

- Wear safety glasses and gloves during installation and servicing

GENERAL

This luminaire is designed for outdoor applications and must adhere to 25°C (77°F) maximum ambient temperature limitation.

Make all electrical connections in accordance with the National Electric Code and any applicable local code requirements.

See Base instructions for proper installation instructions.

MOUNTING

CAUTION

Unit will fall if not installed properly

- Follow installation instructions

1. Place unit on 3" diameter x 3" long tenon.
2. Torque set screws to 10-12 ft-lbs.

GLOBE REMOVAL/INSTALLATION

1. Remove globe by rotating counter-clockwise approximately 90° and raising off locking ring (see Figure 1)
2. Install lamp (see Lamp Section).
3. Access to optional internal louver/shielding is available with globe removed. Orient shielding such that light is blocked in direction intended.
4. Replace globe by lowering into locking ring and rotating 90° clockwise.
5. Verify that orientation of globe is correct. For proper orientation, see "Street/house side" label on globes so equipped. Orientation of the globe may be changed by loosening tenon set screws and rotating in desired direction. Retighten set screws.

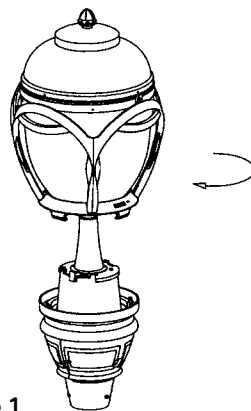


Figure 1

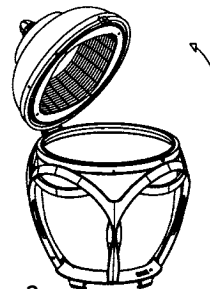


Figure 2


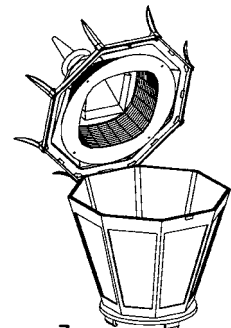


Figure 3

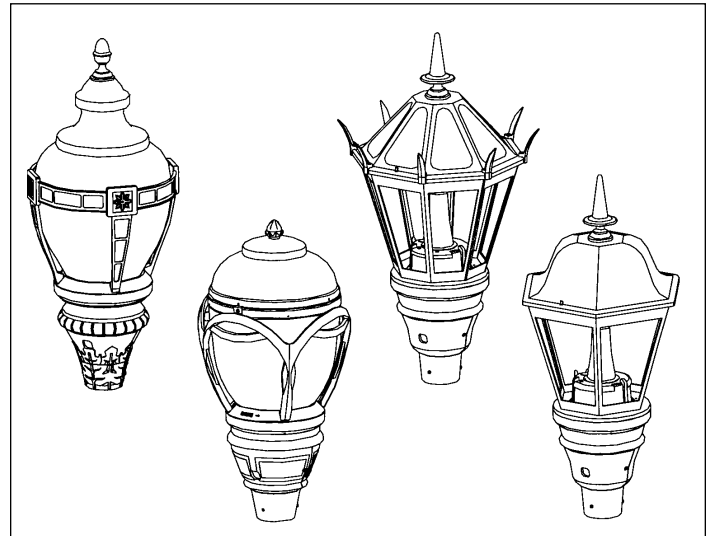

LAMP

CAUTION

Risk of burn

- Allow lamp/fixture to cool before handling

Lamp maintenance may be performed in one of three ways.

1. The complete globe and/or globe assembly may be removed by following instruction given in GLOBE REMOVAL/INSTALLATION section (see Figure 1).
2. For hinged top globe assembly the lamp may be accessed by opening the top portion of the globe in one of the following manners:
 - a. Disengage the clip by pulling it away from globe ring and rotate the top upward (see Figure 2). To close, rotate top downward and engage clip.
 - b. Thumb screw securing the lid should be rotated counter clockwise until it disengages then rotate top upward (see Figure 3). To close rotate to downward and secure thumb screw by rotating clockwise until tight.



GE Lighting Solutions • 1-888-MY-GE-LED • www.gelightingsolutions.com
1-888-69-43-533

GE Lighting Solutions is a subsidiary of the General Electric Company. Evolve and other trademarks belong to GE Lighting Solutions. The GE brand and logo are trademarks of the General Electric Company.
© 2011 GE Lighting Solutions. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.