



LED Lamps - General Purpose



Selectable LED A-Line Lamps

Current's Selectable A-Line LED Lamps feature the ability to cover five common color temperatures with a single lamp. Use the built-in switch to select the desired color temperature, no tool required.



SpectraChoice™

PERFORMANCE HIGHLIGHTS:

| Selectable LED A-Line Lamps | |
|-----------------------------|------------------------------|
| Light Output: | Up to 1,600 Lumens |
| CRI: | 90 |
| Selectable CCT: | 2700K/3000K/3500K/4000/5000K |
| Input Voltage: | 120 |
| Efficiency: | Up to 107 LPW |
| Wattage: | 6W, 10W, 13W, 15W |
| Life: | 15,000 hours L70 |
| Temperature Rating: | -20°C to 45°C |
| Location Rating: | Damp |

FEATURES:

Color Temperature Selectability:

- SpectraChoice™: five color temperature levels that can be adjusted with a built-in switch, no tool required
- Lamps are offered in 40, 60, 75 & 100W incandescent equivalent lumens
- Up to 15,000 hours rated life (L70)
- High Color Rendering (90 CRI) & CEC Title 20 Compliant
- These lamps are energy efficient, contain no lead or mercury, and are compliant with material restriction requirements of RoHS

LIMITED WARRANTY

5 years

LEARN MORE:

To learn more about saving money and energy, go to www.LED.com.

BENEFITS:

- Energy + Cost Savings
- Use one lamp for many applications, simplifying project management by streamlining BOMs
- One lamp can replace many, greatly reducing inventory
- One lamp can be used to match the color in a variety of spaces, reducing stock and potential for color mismatch
- Energy efficiency and long life mean fewer lamp replacements versus standard incandescent and halogen light sources



Selectable LED Lamps

Do more with less.


- *Reduce Inventory*
- *Simplify Projects*
- *Optimize Solutions*



LED Lamps - General Purpose

Selectable LED A-Line Lamps

CUSTOMER NAME _____
 PROJECT NAME _____
 DATE _____ NOTES _____

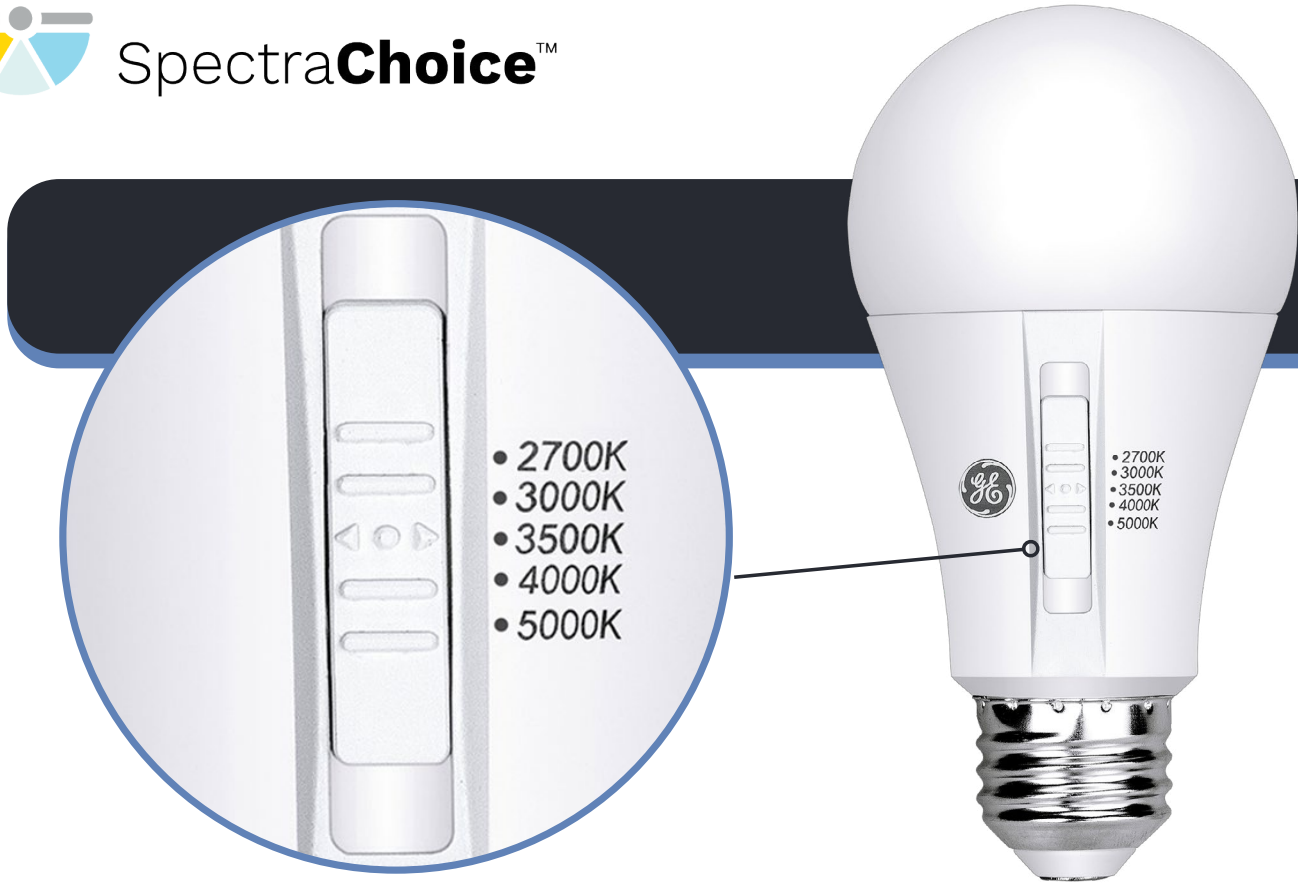

Selectable SpectraChoice™ A-Line Lamps (Dimmable)

| Bulb Shape | Base Type | Watts | Order Code | Description | Volts | Carton Qty ² | MOL (In) | Lumens (Initial) ³ | Selectable Color Temp. (Initial) [*] | CRI | Wattage Replacement | Rated Life L70 (Hrs) ¹ | Dimmable | Location Rating ³ | Additional Information |
|---|-----------|-------|------------|-----------------|-------|-------------------------|----------|-------------------------------|---|-----|---------------------|-----------------------------------|----------|------------------------------|------------------------|
| A-Line SpectraChoice™ Selectable Color Temperature | | | | | | | | | | | | | | | |
| A19 | E26 | 6 | 93313531 | LED6DA19/9SC/E | 120 | 24 | 4.3 | 480 | 2700K* 3000K 3500K 4000K 5000K | 90 | 40 | 15,000 | Yes | Damp, Enclosed | White, CEC Title 20 |
| A19 | E26 | 10 | 93313549 | LED10DA19/9SC/E | 120 | 24 | 4.3 | 800 | 2700K* 3000K 3500K 4000K 5000K | 90 | 60 | 15,000 | Yes | Damp, Enclosed | White, CEC Title 20 |
| A19 | E26 | 13 | 93313543 | LED13DA19/9SC | 120 | 24 | 4.7 | 1100 | 2700K* 3000K 3500K 4000K 5000K | 90 | 75 | 15,000 | Yes | Damp | White, CEC Title 20 |
| A19 | E26 | 15 | 93313537 | LED15DA19/9SC | 120 | 24 | 4.7 | 1600 | 2700K* 3000K 3500K 4000K 5000K | 90 | 100 | 15,000 | Yes | Damp | White, CEC Title 20 |

¹ The life rating is based on the hours of operation the lamp will provide before reaching 70% of its original lumen output (L70)

² Minimum order quantity = Carton Qty

³ UL 1993 Environmental Requirements for LED LAMPS

Damp Location – Exterior or interior location that is normally or periodically subject to condensation of moisture in, on, or adjacent to electrical equipment, including partially protected locations

* Default color temperature setting is 2700K