


LED Hazardous Location Lamps

A Smarter, Safer Switch From HID



AVAILABLE ONLY IN TYPE B

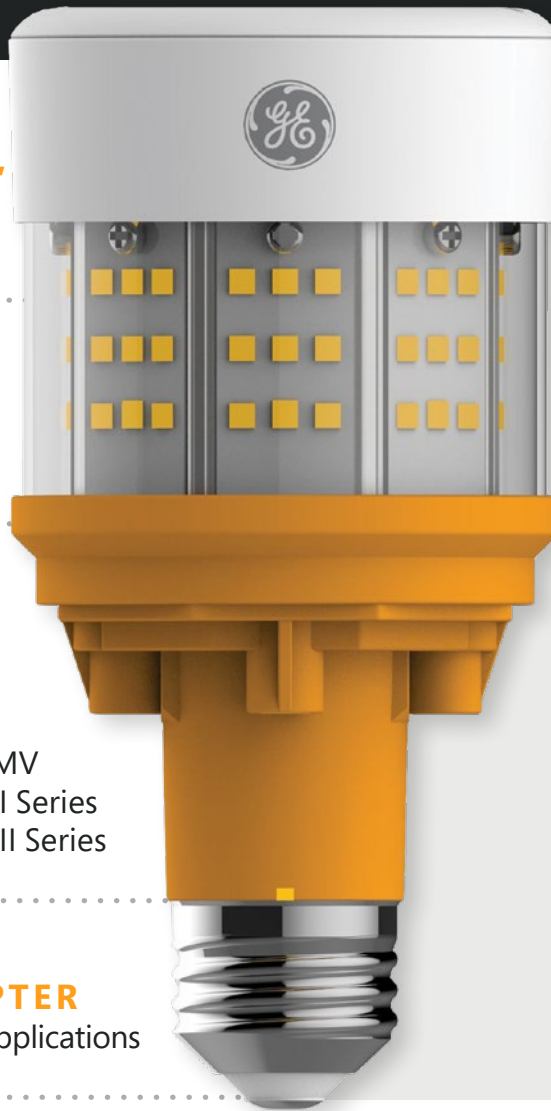

**RATED FOR CLASS 1,
DIVISION 2
A, B, C, D**




Industry-leading
ANSI DESIGN



**UL-CERTIFIED
FIXTURES**

GE Filtr-Gard™
Crouse-Hinds Champ® VMV
Appleton™ Mercmaster™ II Series
Appleton™ Mercmaster™ III Series



E39 SOCKET ADAPTER
included for mogul base applications



50,000-hour rated life
2.5x longer life than HID



50% less energy usage
with similar light output



**High maximum
temperature ratings**
21W: 65°C | 35W: 55°C
45W: 45°C

Minimum starting
temperature: -20°C



**5-year;
50,000-hour warranty**

Don't compromise where safety is a concern. Choose LED hazardous location lamps from GE Current, a Daintree company. To learn more about hazardous location lighting, visit products.gecurrent.com/hazardous-location-lighting.

GE current
a Daintree company

© 2020 Current Lighting Solutions, LLC. All rights reserved. GE and the GE monogram are trademarks of the General Electric Company and are used under license. All other trademarks are the property of their respective owners. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.

www.gecurrent.com | LEDL088 – Rev 10/08/20